

Stucki air:LINQ™



Stucki air:LINQ™



MULTI-CATEGORY PRODUCT

Strong, robust design for safe and secure transit eliminates undesired air hose separations. Three heavy-gauge, easy-to-use fasteners and safe 3-point securement ensures tightness while in service.



air:LINQ ARM

- Slim sweeping design to avoid interference
- Dovetail for one-man installation
- Arm includes hole for universal hose-support strap
- Cross section & geometry are designed for strength to meet high load requirements

FEATURES & BENEFITS


- Head & arm are separate for light-weight, easy application
- Slim design avoids end sill contact
- Conditionally approved per AAR Specification S-060 and S-4021
- One-man installation
- Can accommodate hex or huck fasteners
- Customizable handle angle and bar length

VERSATILE DESIGN

Stucki air:LINQ's are typically applied to any freight car with a long shank coupler. Standard coupler length is 60in. while longer models stretch all the way to 69".

This includes car types such as :

- Autoracks
- Box Cars
- Longitudinal Coil Cars
- Transverse Coil Cars
- Flat Cars
- Bulkhead Flats
- Center Beam Cars

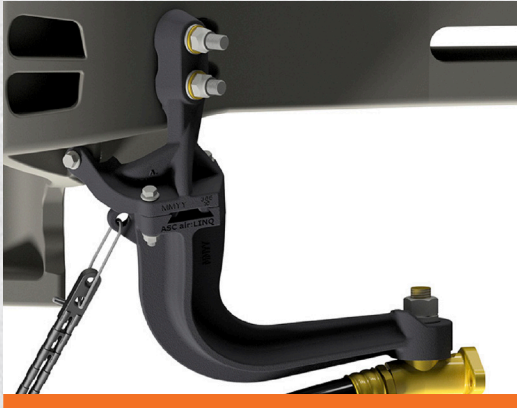

air:LINQ Mount Head

- Slim sweeping design to avoid interference with anything on car
- Clamping effect for high strength in application
- Austempered part for strength & to resist vibration wear
- Third mounting hole to locate part, helps provide for one-man installation
- Mount head is separate from arm for future F-coupler interchangeability application
- Lock nuts inhibit loosening of mount head
- Easy-to-use locking fasteners

air:LINQ Insert

- Slim design to fit any E or E/F Coupler
- Clamping for strength in application
- Austempered part for strength & to resist vibration wear
- Huck bolt or standard hex can be used



Bracket for alternate EOT attachment

