


XOMOX® High Performance Valves



TANK CAR

XOMOX® Lined Ball Valves provide cost-effective performance for most chemical applications, ensuring minimal leakage and emissions with the patented SX stem seal.

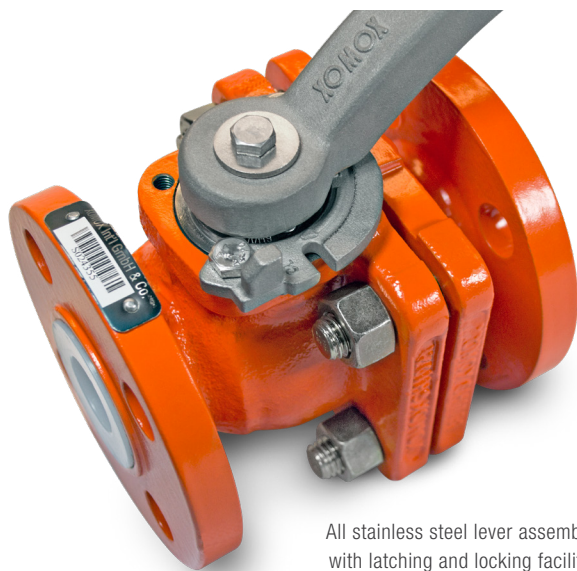

All stainless steel lever assembly with latching and locking facility.

2-Inch Flanged Ball Valve

Part Number: X06H3010H

FEATURES & BENEFITS

- Anti blow-out integral ball and stem retains positive control and minimizes the danger of stem/ball failures due to liner damage at wear points.
- Wide conical plastic connection designed to maintain total seal even under extreme thermal cycling.
- Locked in fluoroplastic liner resists shrinkage and collapse, and permits vacuum applications.
- Stainless steel lever latching device minimizes possibility of accidental operation. Locking capability as standard. Made of stainless steel material ideal for corrosive environments.
- Chemically modified PTFE (CMP) seats provide greater pressure stability at higher temperatures than conventional PTFE.
- Metal-to-metal contact at body joint ensures that no parts of the lining can be crushed or deformed because of forces within the piping system.
- Atmospheric seal innovative “pressure assisted” SX seal device provides the highest protection against fugitive emissions.