



INSTALLATION INSTRUCTIONS FOR HANDRAIL SAFETY GUARD HSG47AL01 AND HSG40AL01

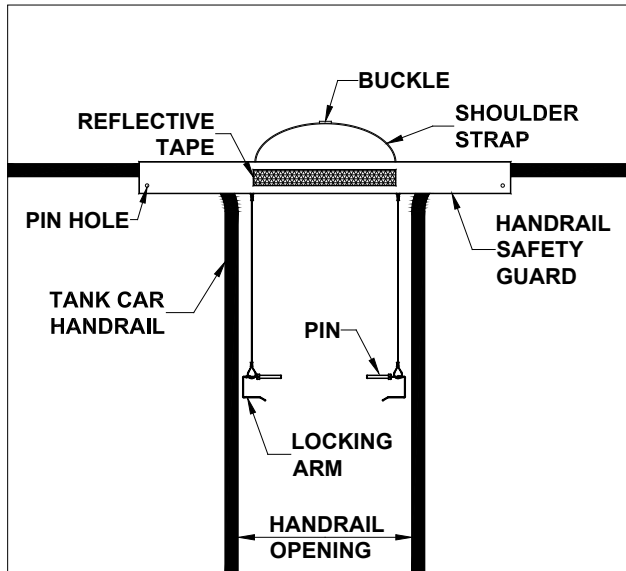

SAFETY GUARD CLOSED POSITION

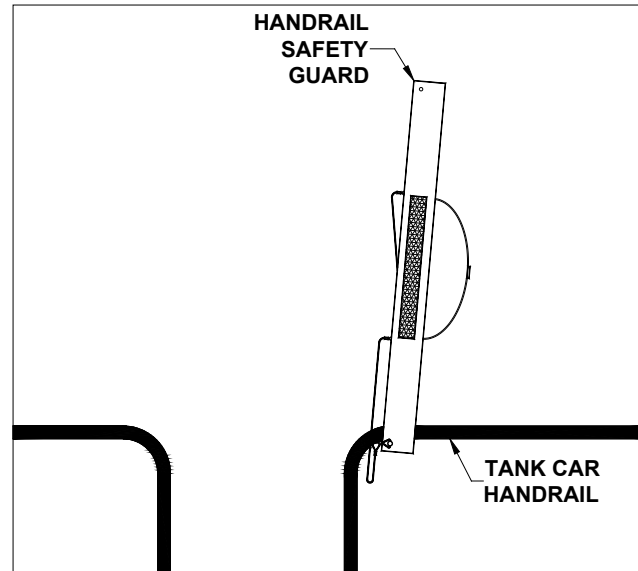

SAFETY GUARD IN OPEN POSITION

1. Adjust the length of the shoulder strap with the buckle. Put the shoulder strap over your shoulder to carry the Handrail Safety Guard to the top of the car while allowing your hands to be free.
2. Once on the car's top platform, remove each pin from its pin hole and allow the pins to hang down from the cables. Slip the aluminum body over the opening in the handrail. Replace each pin in the pin hole and secure each with the locking arm. Make sure each pin passes under the handrail the Safety Guard is resting on.
3. If after the Handrail Safety Guard is in place, a person needs to leave the platform area via the ladder, the Safety Guard can be rotated out of the way temporarily to allow access. This is done by removing one pin from its pin hole, rotating the Safety Guard body more than 90° and allowing the safety guard body to rest on the handrail. Always put the Safety Guard back down on the handrail after access is complete. ***The Handrail Safety Guard should never be left up in the air.***
4. When work on top of the car is complete and the Handrail Safety Guard is ready to be removed, remove each pin from its pin hole, raise the Safety Guard off the handrail and replace each pin in its pin hole making sure to secure each with the locking arm. Put the shoulder strap over your shoulder to carry the Handrail Safety Guard to the ground while allowing your hands to be free.
5. Reflective tape is included on both sides of the Safety Guard body to increase its visibility in all lighting conditions.