

INSTALLATION INSTRUCTIONS FOR V2K7IS

1. Remove the gasket from the hatch cover.
2. Remove the existing one-piece screen or the two half-moon screens by punching out the existing rivets. See Figure 1. Do not leave any parts or broken pieces inside the cover.
3. Inspect the gasket tabs in the gasket groove to verify that none are broken or damaged. See Figure 1.
4. Install the new screen. Be sure the screen material is aligned with the air openings in the cover. See red outlines in Figure 2. Make sure that each notch on the screen snaps fully over the gasket tabs on the hatch cover. See Figure 3.
5. Install a new gasket into the cover. See Figure 4.

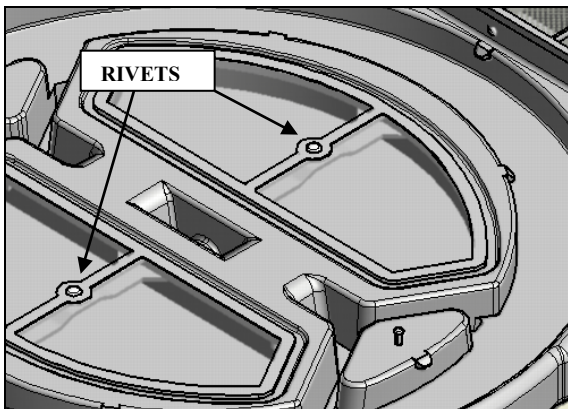


Figure 1.

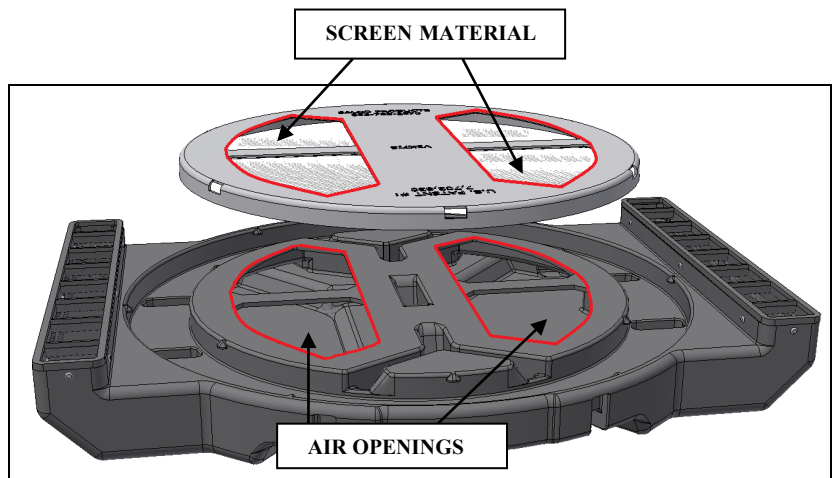


Figure 2.

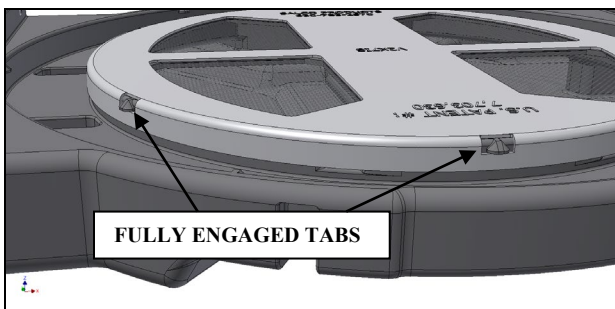


Figure 3.

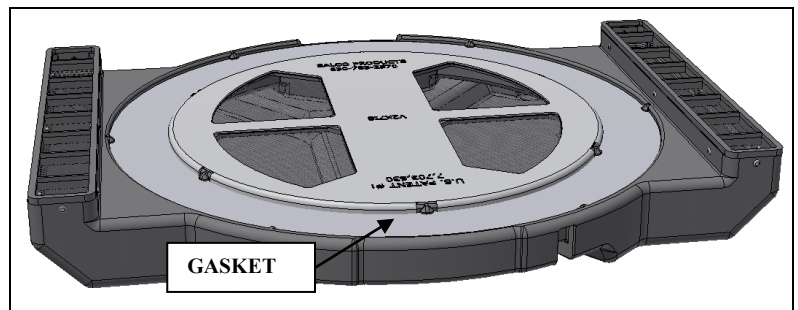


Figure 4.