

# Apollo<sup>®</sup> Transportation Valves

 TANK CAR

Apollo<sup>®</sup> is the brand of ball valves made in the U.S. with the best delivery times in the industry. Manufactured in ISO registered and AAR certified facilities means never having to compromise on performance or reliability.

## AVAILABLE FOR IMMEDIATE SHIPMENT

As the **exclusive distributor** of Apollo<sup>®</sup> valves for the transportation industry, Salco Products has many different arrangements, materials, and sizes in stock for immediate shipment.



## FEATURES & BENEFITS

- Resafe construction guards against leakage in the event of an accident - ideal for tank car operations.
- Vented ball at stem slot relieves thermal expansion of volatile media trapped in the body cavity.
- Full-port design maximizes flow and reduces loading/unloading times.
- Blowout-proof stem design enhances operational safety under pressure.
- Anti-static grounding device prevents static discharge - essential in flammable environments.
- Special no-rise handle enables installation in tight or confined spaces.
- Bolted body construction allows for repairability and or replacement of internal components.

## ACTUATOR FRIENDLY

The valves are “actuator friendly” featuring an ISO 5211 mounting pad. The valves are equipped with a grounded ball and stem. The ball is vented in the stem slot to relieve body cavity pressure in the open position. A heavy-duty 316 stainless steel gland plate mates with the Racking gland to assure secure, self-aligning compression of the packing.



### Threaded x Flange

Sizes: 1" - 2" - 3"



#### Class 150

CS - 285psi @ 100°F    88A - 380 Series - CS

SS - 275psi @ 100°F    87A - 380 Series - SS

AAR# E199031

### Flanged x Kam

Sizes: 2" - 3"



#### Class 150

CS - 285psi @ 100°F    88A - 370 Series - CS

SS - 275psi @ 100°F    87A - 370 Series - SS

AAR# E199031

### Flanged End

Sizes: 1/2" - 12"



#### Class 150                      Class 300

CS - 285 psi @ 100°F    CS - 740psi @ 100°F

SS - 275 psi @ 100°F    SS - 720psi @ 100°F

AAR# E199030

### Two-Piece Threaded

Sizes: Various - 3"



#### 

76 Series

Ratings to 2000 psig @ 100°F


76F (A) Series

Some down-rating to 1500 psi

AAR# E199025

### Bottom Outlet Valve

Sizes: 4"

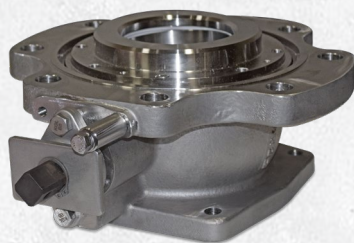

#### 

AAR# E139507

## AMERICAN-MADE. BUILT TO PERFORM



MADE IN THE USA



SUPERIOR PERFORMANCE



HIGH QUALITY RAW MATERIALS



EXTENSIVE WARRANTY



View website for full product offering at:  
[www.stucki.com](http://www.stucki.com) ►